

RAPID SET™ SYSTEM

INSTALLATION INSTRUCTIONS

Do not remove side wood stabilizers until anchored to concrete.




Attach rigging with spreader bar to lifting eyes

 **CAUTION**

**STAY CLEAR FROM
SUSPENDED LOAD**

LIFTING EYE CAPACITY: 700lbs combined max

Place Rapid Set on concrete pad.

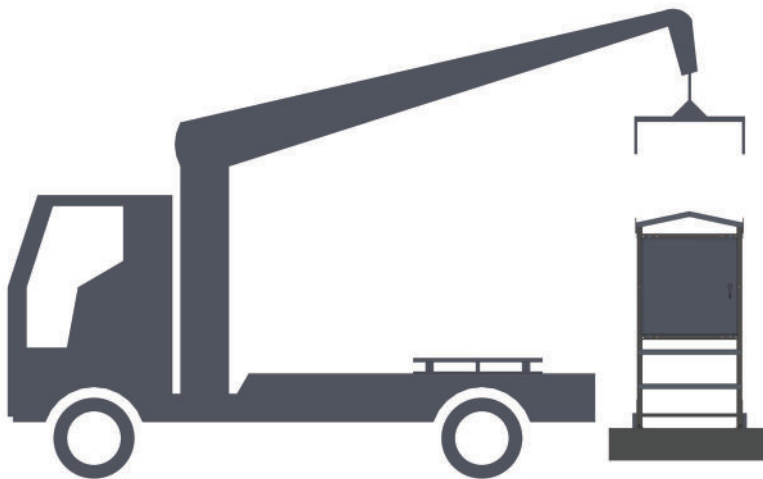


 **WARNING!**

Tip Over Hazard


Anchor Rapid Set to the concrete pad

Only use specified anchor bolts, 4 bolts required





- 0.5 DIAMETER WEDGE ANCHOR, ICC APPROVED, MINIMUM TENSION CAPACITY OF 3000 LBS

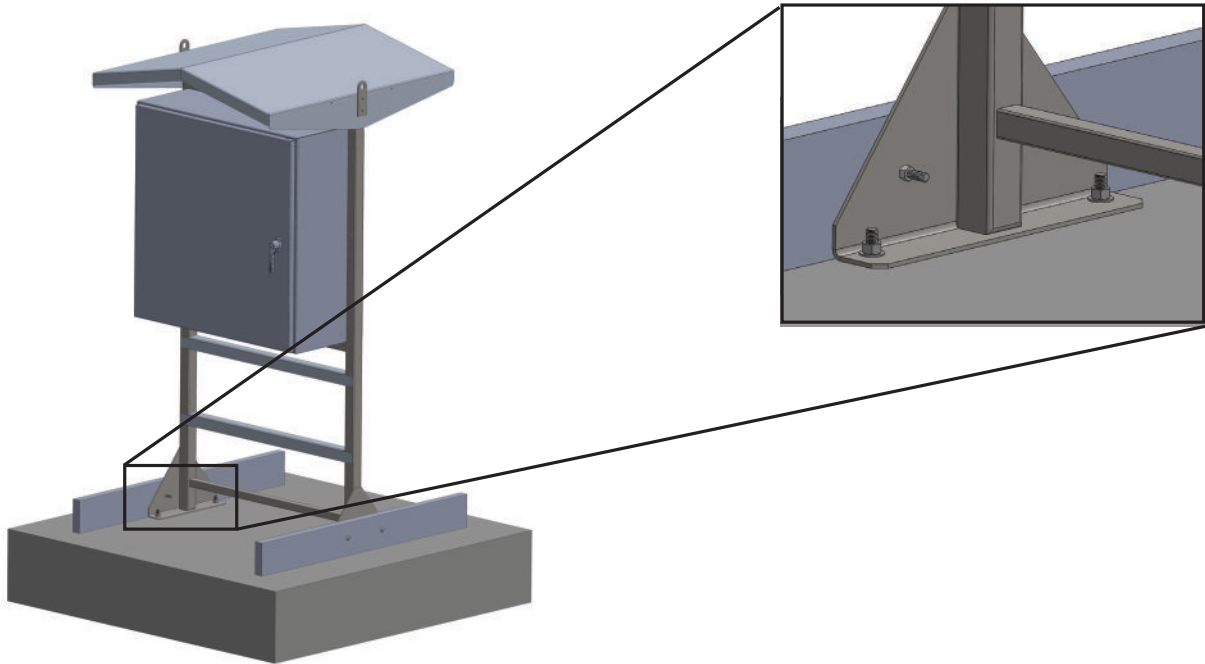

Remove side wood stabilizers

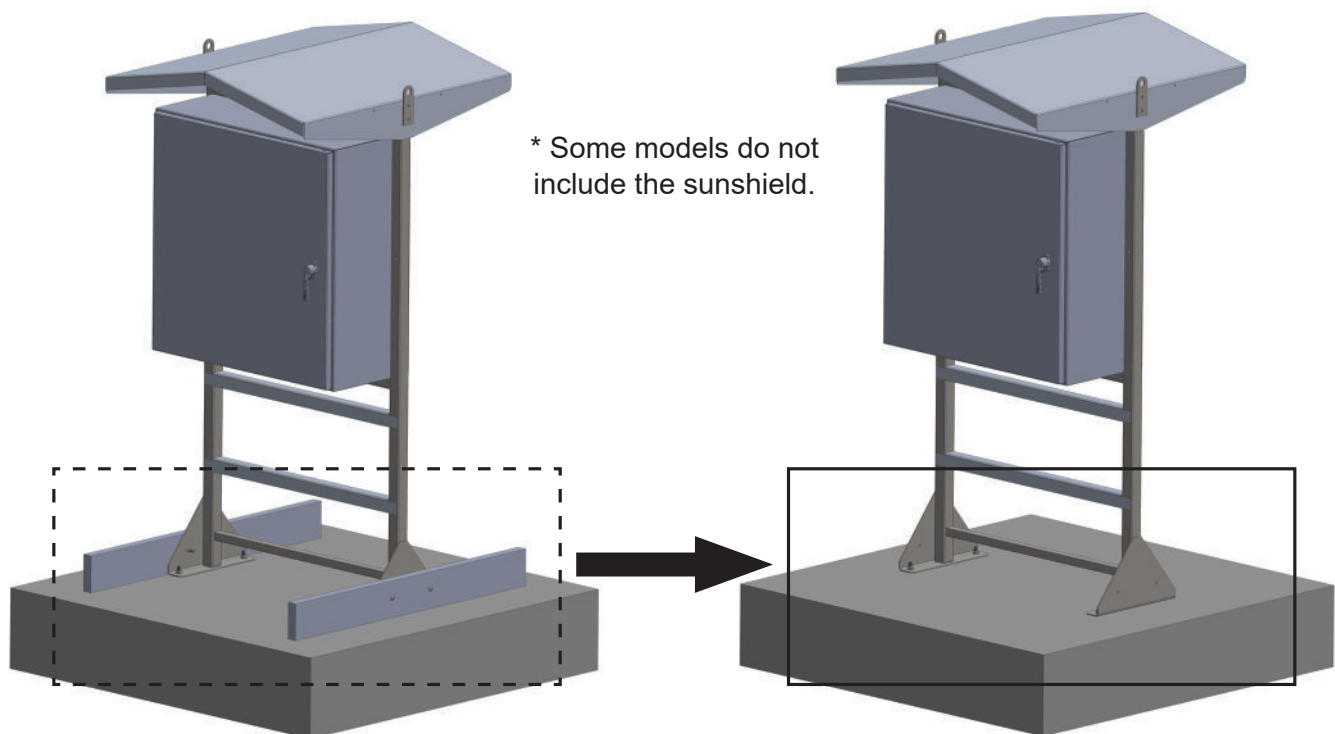

* Some models do not include the sunshield.

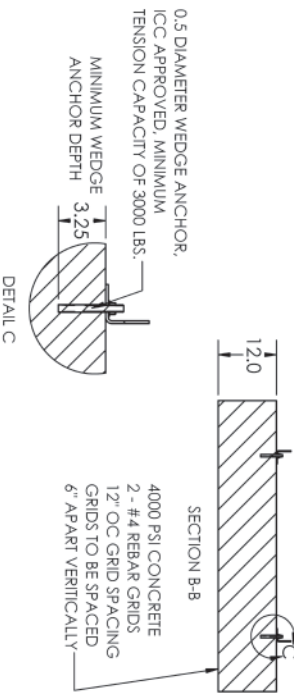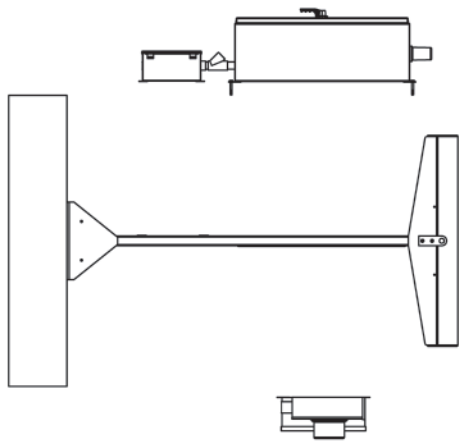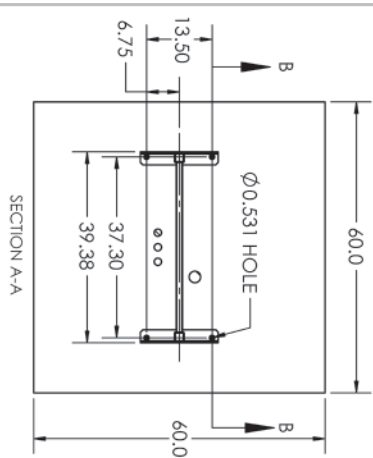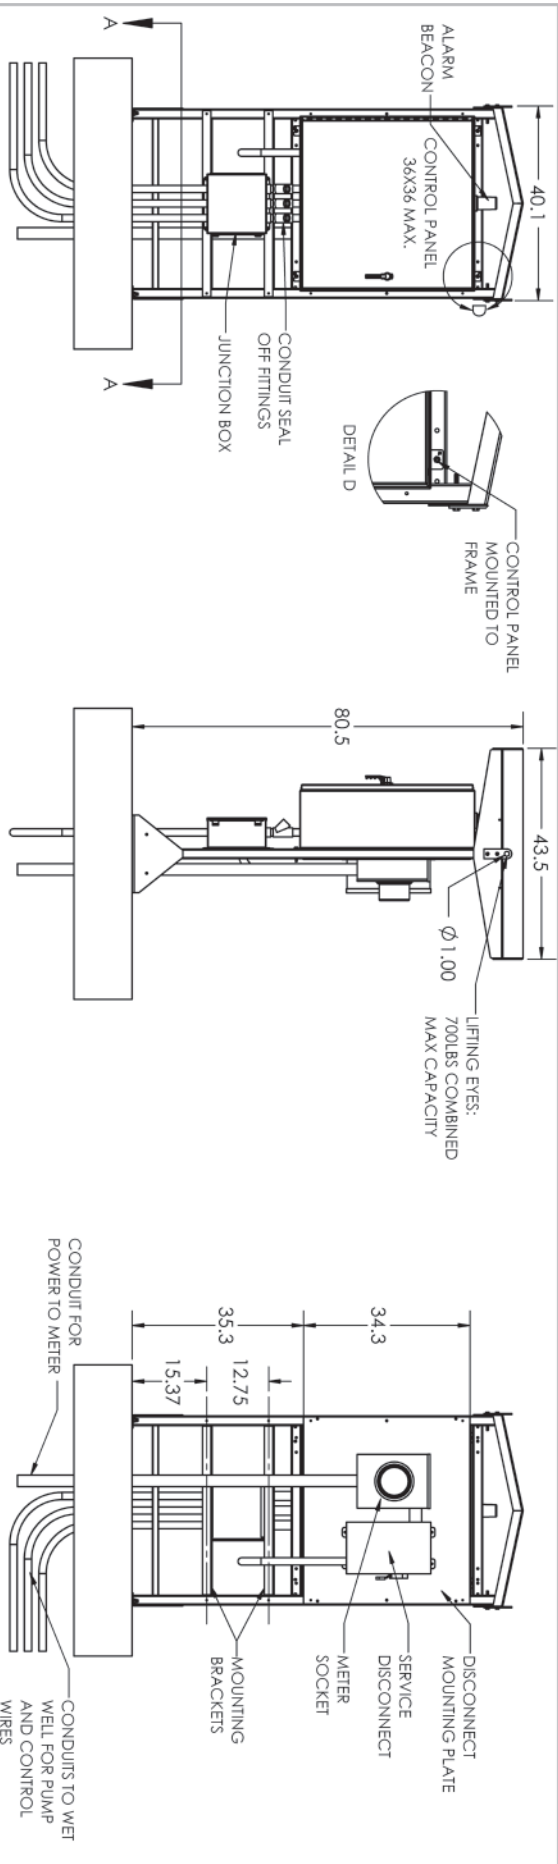

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES			
TOLERANCES:	DRAWN	NAME	DATE
ANGULAR: MACH - ±2°	XXXXXX	XXXXXX	XXXXXX
BRD - ±2°			
TWO PLACE DECIMAL - ±0.01	CHECKED		
THREE PLACE DECIMAL - ±0.003	ENG APPR.		
INTERPRET: DIMENSIONAL	MFG APPR.		
TOLERANCING FINE	G.A.		
MATERIAL	COMMENTS:		
FINISH	SEE NOTES		
DO NOT SCALE DRAWING			

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SJE. IT IS TO BE USED FOR THE PROJECT AND SITE SPECIFICALLY IDENTIFIED HEREIN. REUSE OR REPRODUCTION OF THIS DRAWING WITHOUT THE WRITTEN PERMISSION OF SJE IS PROHIBITED.			
SIZE	DWG. NO.	REV	
B		01	
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1	

TITLE:
RAPID SET V1-122



Manufactured by: SJE Inc.
Technical support: +1-800-746-6287
techsupport@sjeinc.com

www.csicontrols.com

www.primexcontrols.com

www.sjerhombus.com

© 2020 SJE, Inc. All Rights Reserved. PN 1067842C 11/24