


INSTALLER FRIENDLY SERIES® (IFS) SINGLE PHASE SIMPLEX CAPACITOR (START/RUN)

Demand Dose or Timed Dose, Float, Sensor or Transmitter Controlled System for Pump Control and System Monitoring

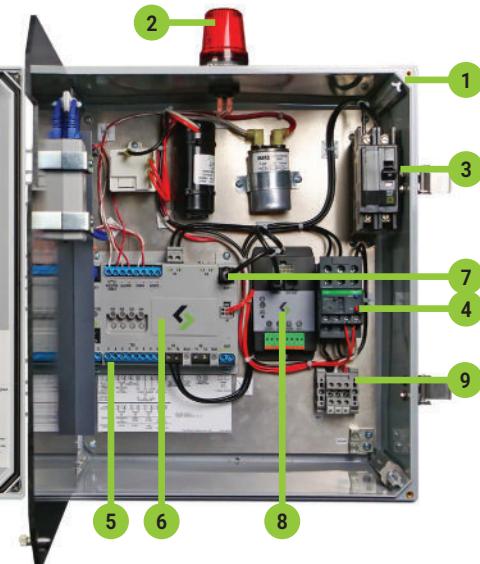

Panel layout may vary with options. Reg. Cdn Pat. & TM Off
US Patent No. 8,336,385; 8,567,242; 8,650,949

The Next Generation IFS simplex capacitor (start/run) control panel utilizes an innovative circuit board design enclosed in a touch-safe housing to control one 120/208/240 VAC single phase pump in water and sewage applications. These newly redesigned IFS panels feature an easy-to-use color LCD interface located on the inner door for programming and system monitoring. The panel configuration can be easily converted in the field to either a timed dose or demand dose through the LCD interface.

The panel can easily be changed in the field to utilize floats, Sub-X™ LT Transmitter or the C-Level™ Sensor for continuous level monitoring. The Sub-X™ LT Transmitter and the C-Level™ Sensor sense the level in the tank and sends a signal to the panel. Pump activation levels can be adjusted by using the LCD interface.

- Five-year limited warranty on panel
- Two-year limited warranty on C-Level™ Sensor and Sub-X™ LT Transmitter

NOTE: SJE Rhombus will warranty motor start kit components supplied by SJE Rhombus for one year. SJE Rhombus makes no warranty of any type with respect to motor start kits supplied by the customer.

LCD INTERFACE FEATURES

- Full color graphics and menu navigation encoder for easy setup
- Touch safe housing
- Pump Hand/Off/Auto Control selectable via menu navigation
- Sub-X™ LT Transmitter, C-Level™ Sensor or float operation selectable
- Demand or Timed Dose operation selectable via menu navigation
- Tank Level Indication and setpoint monitoring at-a-glance
- Lead pump is easily identified by a graphic ring around the current lead pump regardless of control mode (timed dose or demand)
- Displays remaining time in Timed Dose mode
- RJ45 communication connector
- Flashing function for alarm beacon and horn (configurable)
- Manual alarm reset (configurable)
- Thermal cutout and seal failure module (optional)



COMPONENTS

1. Enclosure base measures 16 x 14 x 6 inches (40.64 x 35.56 x 15.24 cm); NEMA 4X (ultraviolet stabilized thermoplastic)
2. Red Alarm Beacon provides 360° visual check of alarm condition
3. Circuit breaker provides pump power disconnect and branch circuit protection included as standard on all panels
4. Option 9_A - Adjustable Overload Relay
5. Sub-X™ LT Transmitter, C-Level™ Sensor and float connection terminal blocks
6. Controller Features:
 - a. Incoming Control/Alarm Power terminal blocks
 - b. Control/Alarm Power/System Status green LED indicators illuminate if control/alarm power is present and controller is operating*
 - c. Controller status green LED indicators for: Power/Active, Float Input Status, Pump Run, C-Level Active*
 - d. Normally open auxiliary alarm contacts included as standard
 - e. Control Power On/Off switch
 - f. Green LED Pump Run indicators illuminate when pump is called to run*
 - g. Control panel able to operate if LCD interface fails or is disconnected
 - h. Touch safe housing
7. Modbus Port (RJ45) for future expansion - eg. remote monitoring, valve control, In-Site®, logging, etc.
8. Option 5AE - Thermal Cutout/Heat Sensor & Seal Failure Module
9. Large incoming power connection terminal block
10. Alarm Horn provides audible warning of alarm condition (Not shown)
11. Exterior Alarm Test/Silence push button allows horn and light to be tested and horn to be silenced in an alarm condition; alarm automatically resets once alarm condition is cleared (Not shown)

*In fault condition, LED indicators will be red.

Note: Options, voltage, and amp range selected may change enclosure size and component layout.

Note: Schematic/Wiring Diagram and Pump Specification Label are located inside the panel.

IFN CONTROL PANEL	7 MODEL TYPE	1 ALARM PACKAGE	W ENCLOSURE RATING	1 STARTING DEVICE	PUMP FULL LOAD AMPS	PUMP DISCONNECTS	LEVEL CONTROL APPLICATION	6A8AC10E OPTIONS (LISTED BELOW)
CONTROL PANEL	✓ IFN							
MODEL TYPE	✓ 7	Single Phase Simplex Capacitor (includes Option 6A, 8AC, and 10E as standard)			\$1,898.29			
ALARM PACKAGE	✓ 1	Alarm Package (includes test/silence switch, red light, & horn)			Base			
ENCLOSURE RATING	✓ W	Weatherproof, NEMA 4X (engineered thermoplastic)			Base			
STARTING DEVICE	✓ 1	120/208/240V IEC Motor Contactor			Base			
PUMP FULL LOAD AMPS	0	0 - 7 FLA			Base			
	1	7 - 15 FLA			Base			
	2	15 - 20 FLA			\$114.33			
	3	20 - 30 FLA			\$128.75			
	4	30 - 40 FLA			\$154.50			
PUMP DISCONNECTS	4	Circuit Breaker			Base			
LEVEL CONTROL APPLICATION	H	Floats - Pump Down (select Option 17 below) Timed dose = redundant off, timer enable, alarm / Demand dose = stop, start, alarm (all systems will ship with 3 floats by default)			See Options			
	E	EZconnex® Float Switch System			See Options			
	X	No Floats, Transmitter or Sensor			Base			
	C	C-Level™ Sensor (select Option 24 or 29)* Select Option 3E and/or 4D for high water alarm and/or redundant off floats			See Options			
	T	Sub-X™ LT Transmitter (select Option 31).* Select Option 3E and/or 4D for high water alarm and/or redundant off floats.			See Options			

PRICING WORKSHEET

IFS Single Phase Simplex Capacitor Base Price	\$1,898.29
Alarm Package	
Enclosure Rating	
Starting Device	
Pump Full Load Amps	
Pump Disconnects	
Level Control Application	
Total Options	
TOTAL LIST PRICE	

*NOTE: When using the Sub-X™ LT Transmitter or C-Level™ Sensor: Operation is for Pump down applications only.

Industry practices suggest that a secondary device, such as a float switch, be used for redundant activation of the high level alarm and pump shut off.

Start/run capacitor kits must be ordered separately (see Option 12 below or call factory).

OPTIONS	DESCRIPTION	LIST PRICE
3E	High Water Alarm Float (must also select Option 17)** Only Available with Level Control Application = C or T	\$40.17
4D	Redundant Off Float (must also select Option 17)** Only Available with Level Control Application = C or T	\$40.17
5AE	Thermal Cutout/Heat Sensor & Seal Failure Circuit (2 wire)	\$322.39
✓ 6A	Auxiliary Alarm Contact, Form A (included as standard)	\$0.00
✓ 8AC	Display Board - Includes: ETM Counter, Events (Cycles) Counter, Alarm Counter (included as standard)	\$0.00
9_A	Pump Overload - Specify Amperage after Number 9 Followed by Letter "A" (must select Option 15A) Example: 912A = 12 amp pump	0 - 30 FLA
		30 - 40 FLA
✓ 10E	Lockable Latch - NEMA 4X (included as standard)	\$0.00
10F	Lightning Arrestor (must select Option 15A)	\$309.00
10K	Anti-condensation Heater (must select Option 15A)	\$149.35
12B	Customer Supplied Motor Start Components, Mounted in Enclosure by SJE Rhombus	Call Factory
12C	Motor Start Components Mounted and Supplied by SJE Rhombus	Call Factory
15A	Control/Alarm Circuit Breaker	\$97.85
16C	30' Cord in Lieu of 20' Cord (per Float)	\$8.24
16D	40' Cord in Lieu of 20' Cord (per Float)	\$16.48

OPTIONS	DESCRIPTION	LIST PRICE
16E	50' Cord in Lieu of 20' Cord (per Float)	\$24.72
16G	100' Cord in Lieu of 20 Cord (per Float)	\$65.92
17C	Sensor Float® / Internally Weighted (3 Floats) - Mercury**	\$170.10
17D	Sensor Float® / Externally Weighted (3 Floats) - Mercury**	\$176.40
17G	SJE MilliAmpMaster™ / Pipe Clamp (3 Floats) - Mechanical**	\$120.51
17H	SJE MilliAmpMaster™ / Externally Weighted (3 Floats) - Mechanical**	\$148.32
17J	Sensor Float® / Pipe Clamp (3 Floats) - Mercury**	\$144.90
19F	4th Float for Timer Override Only Available with Level Control Application = H	\$40.17
24E	C-Level™ CL40 Sensor with 25' Vented Cable	\$341.25
24F	C-Level™ CL40 Sensor with 50' Vented Cable	\$393.75
24P	C-Level™ CL40 Sensor with 100' Vented Cable	\$498.75
29A	C-Level™ CL100 Sensor with 25' Vented Cable	\$341.25
29B	C-Level™ CL100 Sensor with 50' Vented Cable	\$393.75
29C	C-Level™ CL100 Sensor with 100' Vented Cable	\$498.75
31A	Sub-X™ LT Transmitter 25' (4-20mA)	\$334.75
31B	Sub-X™ LT Transmitter 50' (4-20mA)	\$386.25
31C	Sub-X™ LT Transmitter 100' (4-20mA)	\$498.25
33D	EZconnex® 3-Port, 25', with 10' Floats (3) / Pipe Clamp	\$350.27
35D	EZconnex® 4-Port, 25', with 10' Floats (4) / Pipe Clamp	\$424.73

**For 3E and 4D options, there is no charge when selecting any of the 17 options.

For additional level control and control panel options, please contact Technical Support at techsupport@sjeinc.com.

Note: Added options, voltage, and amp range selected may change enclosure size and enclosure features, and component layout. Schematic/Wiring Diagram and Pump Specification Label are located inside the panel.

SENSOR/TRANSMITTER	OPERATING RANGE
C-Level™ CL40	0-39.9 inWC
C-Level™ CL100	0-99.9 inWC
Sub-X™ LT Transmitter (4-20mA)	0-100 inWC