


H2O DRIVE® CONSTANT PRESSURE CONTROL

Single Phase, 240V - Variable Frequency Drive Well Pump Control Panel

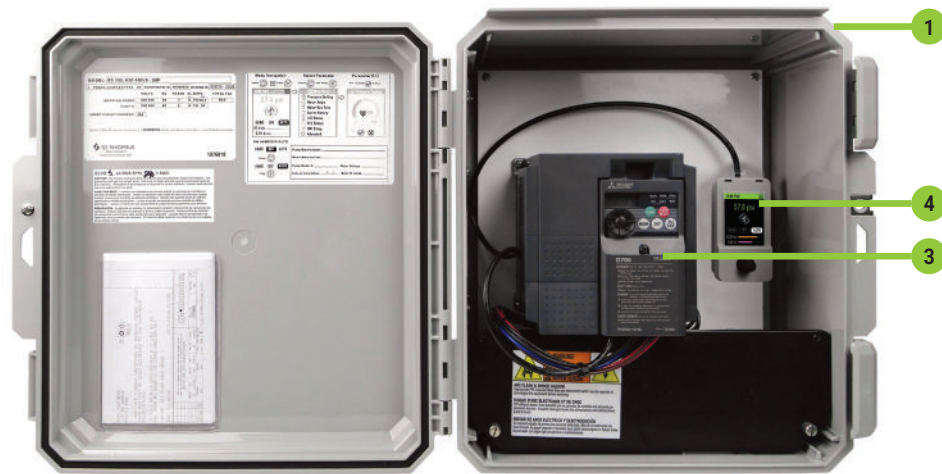

The H2O Drive® control panel is designed to control a three phase submersible well pump in constant pressure control applications.

As flow conditions change in the pumping system, the VFD is able to automatically control the pump speed and maintain a constant pressure. The desired set pressure is entered on the color LCD display. The pressure transducer measures the pump system pressure.

FEATURES


- 2 step quick start wizard for easy setup
 1. Enter set pressure
 2. Enter well pump amps (SFA)
- Graphic color display (LCD):
 - High Brightness / Direct sunlight readable
 - Removable/handheld for easy programming
 - Discharge Pressure (PSI)
 - Pump run indication
 - Pump speed (Hz)
 - Pump Amps (A)
 - Message bar (Status & Alarm)
 - Alarm history
 - Password protection
 - Rotary button for easy menu navigation
- Pump dry run alarm
- Well recharge timer function
- High and Low Pressure Alarm
- Pump motor overload protection
- Monitors transducer faults
- Includes 0-150 PSI pressure transducer with cable
- 2 digital inputs for optional level or floor sensor
- 60Hz max. motor speed (default)
- Up to 80Hz max. possible in select systems



COMPONENTS

1. Enclosure: NEMA 3R ultraviolet stabilized thermoplastic rated for outdoor use with mounting flanges, padlockable cover
2. Vents for VFD cooling (not shown)
3. Variable Frequency Drive
4. LCD controller display

Note: See specifications on back side for sizing.

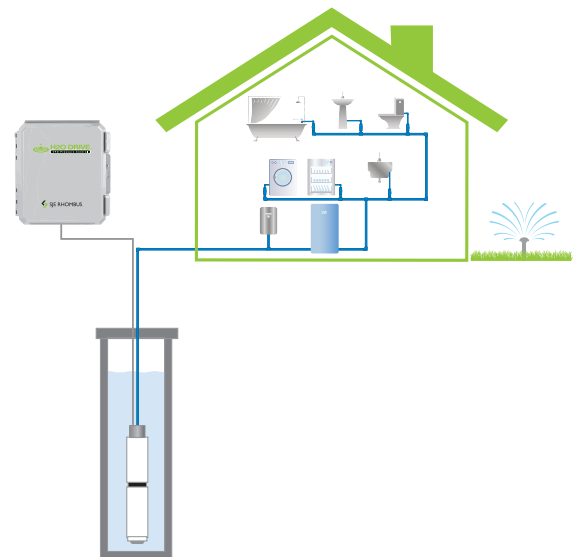

Part #	Model	HP	Max Amps	Sine Filter	Input	Pump Rating	Enclosure Size	Shipping Weight	List Price
1076917	RD150 ¹	0.5 - 1.5	7.5A	No	240V, 1 Phase	208/230V, 3 Phase	14 x 12 x 6	17 lbs.	\$1,854.00
1076918	RD300 ¹	2.0 - 3.0	11.6A	No	240V, 1 Phase	208/230V, 3 Phase	14 x 12 x 6	18 lbs.	\$1,957.00
1076919	RD500	5.0	17.8A	No	240V, 1 Phase	208/230V, 3 Phase	18 x 16 x 10	33 lbs.	\$3,399.00
1107747	RD750	7.5	28.0A	No	240V, 1 Phase	208/230V, 3 Phase	28 x 20 x 12	41 lbs.	\$5,356.00
1107690	RD1000	10	35.0A	No	240V, 1 Phase	208/230V, 3 Phase	28 x 20 x 12	44 lbs.	\$6,077.00
1107691	RD1500	15	55.0A	No	240V, 1 Phase	208/230V, 3 Phase	28 x 20 x 12	46 lbs.	\$7,519.00
1123857	RD2000	20	125A	No	240V, 1 Phase	208/230V, 3 Phase	30 x 24 x 12	150 lbs.	\$11,282.00
1123708	RD3000	30	154A	No	240V, 1 Phase	208/230V, 3 Phase	36 x 30 x 12	212 lbs.	\$13,859.00
1107750	RD150SF	0.5 - 1.5	7.5A	Yes	240V, 1 Phase	208/230V, 3 Phase	14 x 12 x 6	19 lbs.	\$2,369.00
1107751	RD300SF	2.0 - 3.0	11.6A	Yes	240V, 1 Phase	208/230V, 3 Phase	14 x 12 x 6	20 lbs.	\$2,472.00
1107752	RD500SF	5.0	17.8A	Yes	240V, 1 Phase	208/230V, 3 Phase	18 x 16 x 10	35 lbs.	\$3,990.00
1107748	RD750SF	7.5	28.0A	Yes	240V, 1 Phase	208/230V, 3 Phase	28 x 20 x 12	44 lbs.	\$5,768.00
1107692	RD1000SF	10	35.0A	Yes	240V, 1 Phase	208/230V, 3 Phase	28 x 20 x 12	47 lbs.	\$6,489.00
1107693	RD1500SF	15	55.0A	Yes	240V, 1 Phase	208/230V, 3 Phase	28 x 20 x 12	50 lbs.	\$7,931.00

¹UL Listed  LISTED

SELECTING THE CORRECT VFD

1. Determine the voltage available on site.
2. Select a well pump with the same voltage (motor must be three phase).
3. Check well pump motor nameplate Service Factor Amps (SFA) for proper VFD sizing.
4. Select a VFD with an output amp rating higher than motor SFA.
5. Use Full Load Amps (FLA) for booster pump application.

SPECIFICATIONS

CONTROL: Pump run indication
Pump speed (Hz) and Amps (A) indication
Pump motor overload protection
High and low pressure alarms
Pump dry run alarm


ENCLOSURE: NEMA 3R ultraviolet stabilized thermoplastic rated for outdoor use with mounting flanges, padlockable cover

PRESSURE TRANSDUCER: 0-150 PSI (included) 1/4" NPT Male, NSF 61 rated, 4-20mA, with 15 ft cable. Two-year limited warranty on pressure transducer.

ENVIRONMENTAL: Surrounding air temperature: 14°F to 104°F (-10°C to 40°C)
Panel internal temperature: 14°F to 122°F (-10°C to 50°C)
Storage temperature: -4°F to 131°F (-20°C to 55°C)
Altitude: Maximum of 3,280 ft (1,000 m) above sea level

ELECTRICAL: Input voltage: 240V nominal
200-240V 50Hz/60Hz, single phase

Note: The output voltage cannot exceed the input voltage.

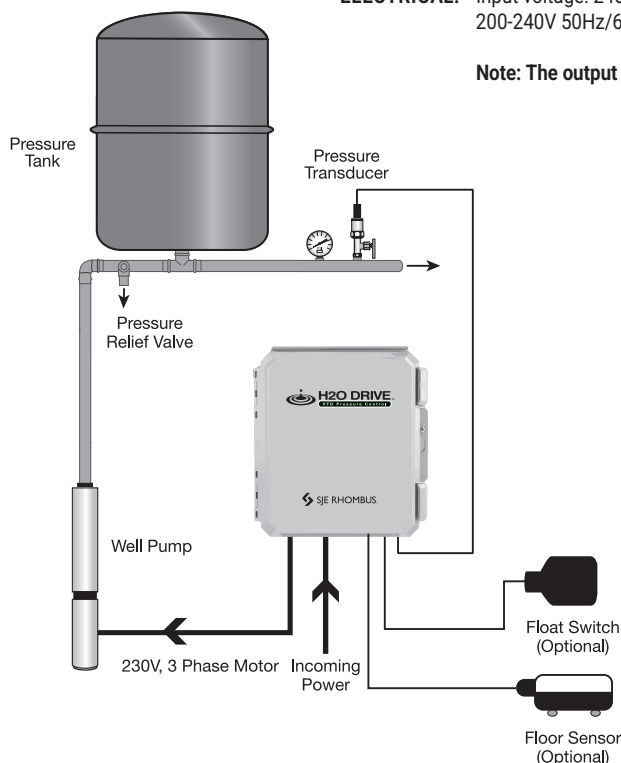

Note: For use in clean water pressure control applications. Not for use with sewage pumps.