
Quick Start Instructions for Panel Link Puck

Specifications:

- Global 4G LTE Cellular & GNSS Location (GPS)
- Low voltage 5-24Vdc, via Cat5 cable
- NEMA 4X, water-tight panel mount hardware
- Operating temp: -20°F to 122°F (-30°C to 50°C)
- FCC, RoHS, UL Type 4X




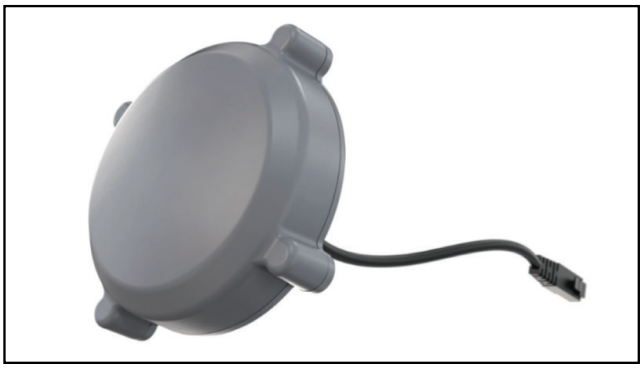

The Panel Link Puck is a simple, plug-and-play cellular device. It connects to new generations of SJE devices such as IFS control panels. Once plugged in and powered, the Puck will automatically connect to the Panel Link platform and transmit data. The "SJE Panel Link" mobile app is used to create an account and to register the Puck's Device ID to that account.

Mounting:

1. Drill a 1-1/8" hole in the enclosure.
2. Insert the Panel Link Puck into the drilled hole.
3. Tighten the lock nut to 5.28 in-lb (0.6 N-m).

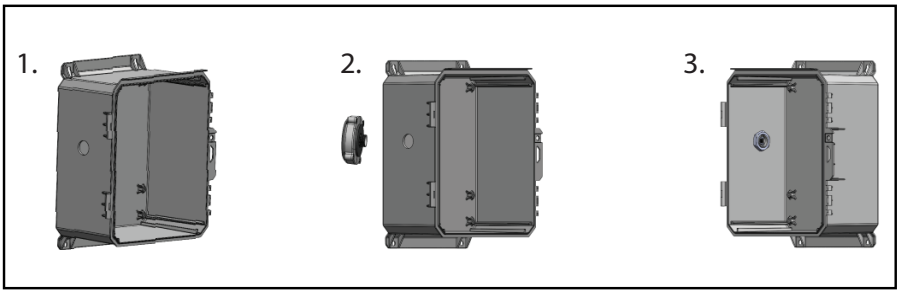

Using Puck with IFS control panels:

1. Connect the Puck to IFS with a Cat5 cable. The Puck will power up and connect to the cellular network and begin data transmission to the Panel Link cloud. After 1 to 2 minutes, the LED on the bottom of the Puck will change from blinking to a slow pulse indicating a connection to the cloud.

2. Verify that the Puck has sufficient signal by finding the icon at the top of the IFS Dial Display. It will toggle between the signal strength and Panel Link cloud connection (see Diagram A and B). Wait for the connection status to be "active", indicated by a cloud with a check mark.



SJE RHOMBUS
Powered by SJE
+1-800-746-6287
techsupport@sjeinc.com
www.sjerhombus.com
Technical Support Hours: Monday - Friday

PN 1127837A 07/26 © 2026 SJE, Inc. All Rights Reserved. SJE RHOMBUS is a trademark of SJE, Inc.

Using Puck with IFS control panels (continued):

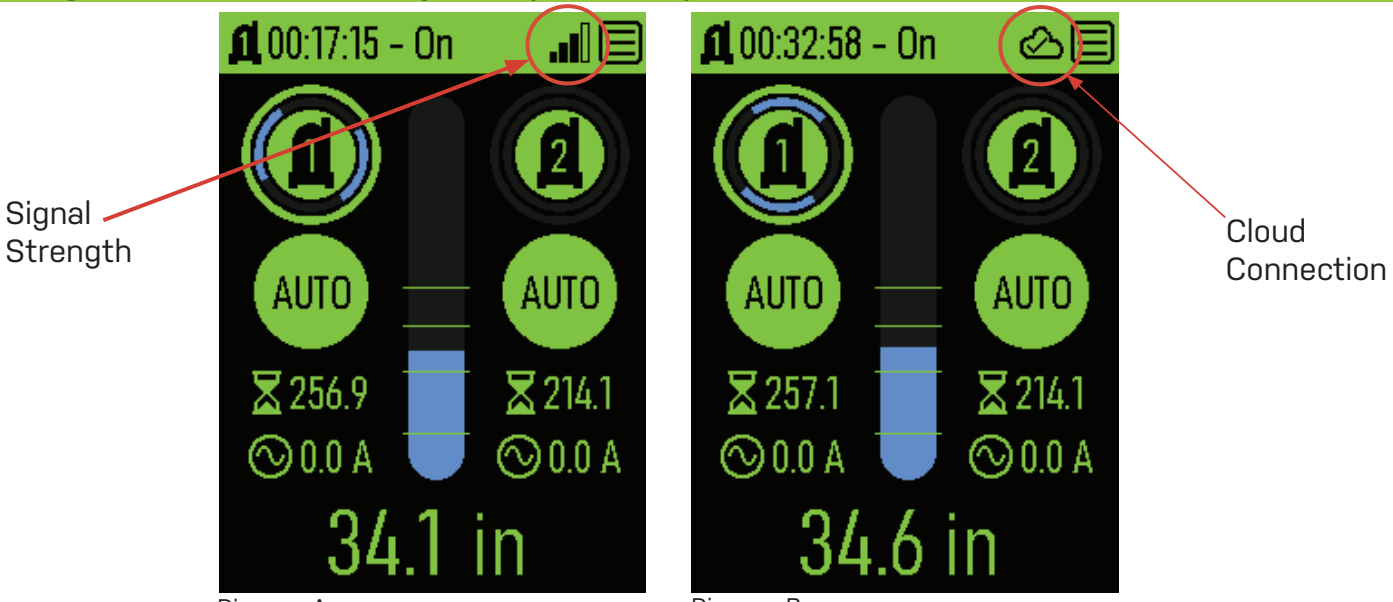


Diagram A Diagram B

3. Next, locate the connection Status and Device Identification number. Both can be viewed on the Dial Display by Selecting Advanced, then Connectivity menu (see Diagram C). The Device ID will match the Device ID printed on the Puck's label. Opening the Device ID menu item will display a QR Code that can be scanned in the next step.



Diagram C



Diagram D



Diagram E

4. Download and open the "SJE Panel Link" mobile app on a mobile device. Follow the instructions to login or create an account and add a device using the "Device ID". The simplest method to add a device is to scan the QR code as shown in Diagram E.
5. After creating a user account and adding a device, navigate to the app's "Notifications" screen. Set up email and text notifications for any number of recipients.
6. Become familiar with the data provided on the app. If there is any missing information, it is most likely because that information needs to be selected or entered on the IFS control panel via the Dial Display.